


Gar Ber

SPIN & GRIN®

Spin-On Fuel Oil Filter

Gar-Ber R2000

with water block
and **BIOGasket™**

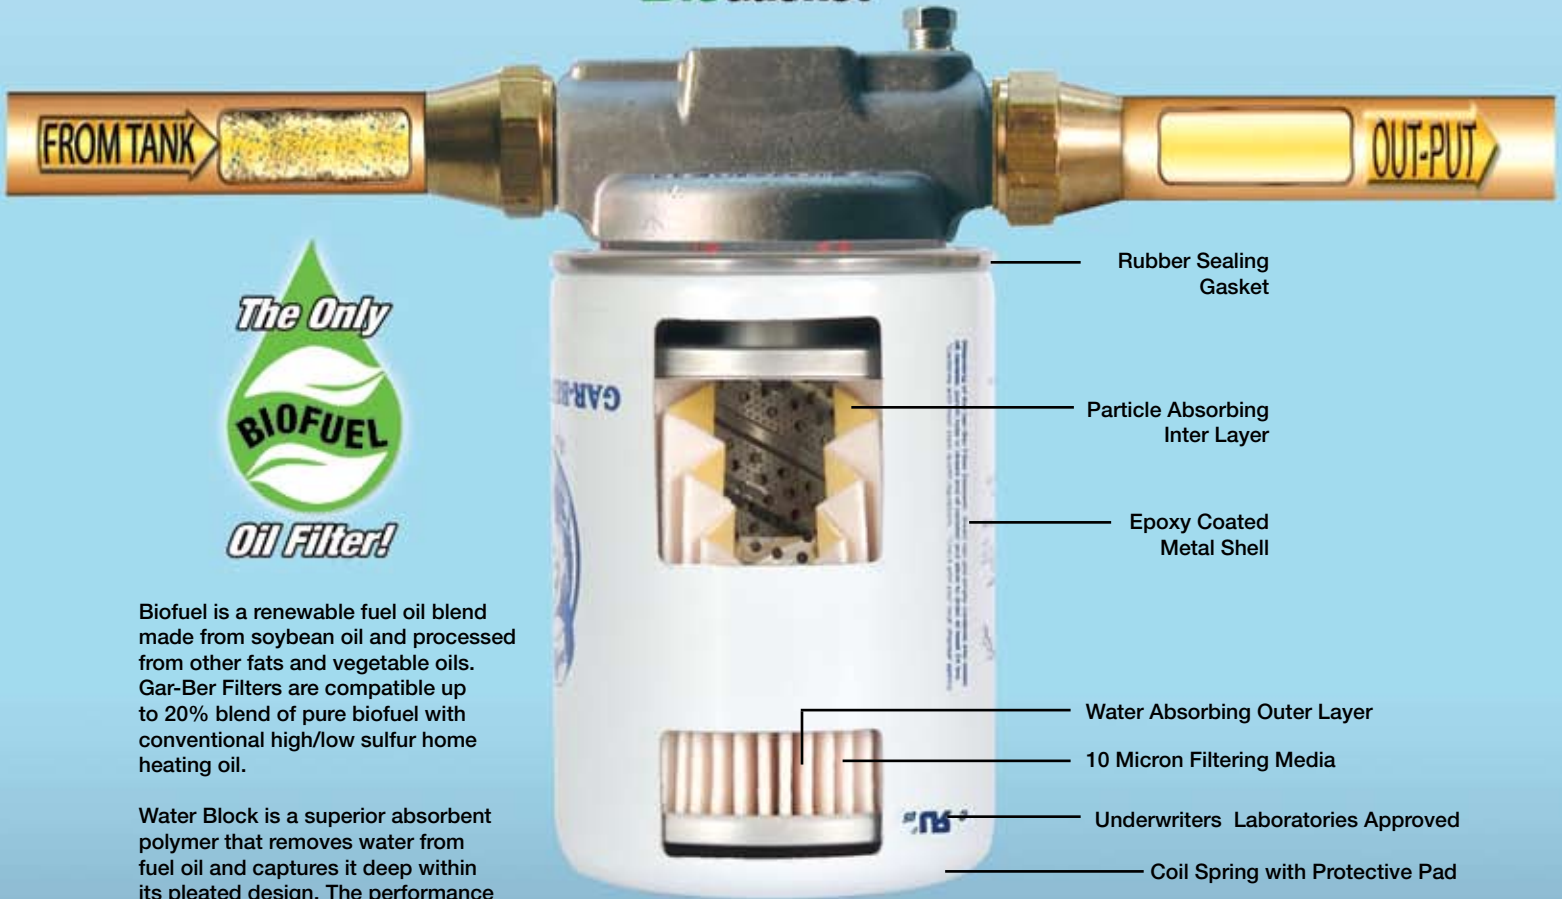

Biofuel is a renewable fuel oil blend made from soybean oil and processed from other fats and vegetable oils. Gar-Ber Filters are compatible up to 20% blend of pure biofuel with conventional high/low sulfur home heating oil.

Water Block is a superior absorbent polymer that removes water from fuel oil and captures it deep within its pleated design. The performance separates the water from the oil so only the heating oil finds it way to the burner. Water Block is an inorganic material that is bacteria resistant and will not support bacterial growth.

Epoxy Coating

The filter shell on all Gar-Ber filters is coated with a fuel resistant epoxy to prevent pin hole leaks that develop due to corrosive conditions that can occur when fuel oils becomes unstable.

Rubber Sealing Gasket

Particle Absorbing Inter Layer

Epoxy Coated Metal Shell

Water Absorbing Outer Layer

10 Micron Filtering Media

Underwriters Laboratories Approved

Coil Spring with Protective Pad



Your Filter's Seal of Assurance when using Bio-Fuel Blends!

The BIOGasket™ is designed to resist the aggressive properties found with bio-fuel blends that cause rubber seals to leak and swell. The BIOGasket™ is a highly durable class M, 100% type 1 fluoroelastomer base as defined under ASTM1418. The BIOGasket™ is the oil heating industry choice for peace of mind assurance you can count on.

Model 11V-R2000

Machined Aluminum Head, with 1/8" Vacuum/Bleed port with #R-2000 Epoxy-Coated Disposable Spin-On Filter.

Standard with **BIOGasket™**

Maximum Firing Rate: 10 gph
 Micron Removal: 10 microns
 Filtering Area: 500 sq in
 Working Pressure: 15 psi
 Flow Rate: 45 gph
 Inlet / Outlet: 3/8" npt
 Dimensions: H-7½" W-3¼"



Designed to deliver **TWICE** the filtration capacity than the generic brands!

Accessories

5 Individually Packed FKM BIOGaskets

Compatible with Bio-Fuel Blends up thru B100!

BG5-R/G FMK BioGasket 5/pk for Spin-On Models



Model 11BV-R2000K

Machined Aluminum Head, Galvanized Attaching Bracket, Filter Restriction Indicator, and #R-2000 Epoxy-Coated Disposable Spin-On Filter.

Standard with **BIOGasket™**

Inlet/Outlet: 3/8" npt
Dimensions:
 Bracket Up Position: H-9¼"
 Bracket Down Position: H-7½" W-3¼"



FRI (K) 30" Vacuum Filter Restriction Indicator Gauge



11V (1A) Alum Residential Filter Head w/Port



AMB (B) Angle Filter Mounting Bracket

Model R-2000 Replacement Cartridge with Water Block

Epoxy coated canister. Recommended on units with either single or double line systems firing up to 10 gph.

Standard with **BIOGasket™**

Maximum Firing Rate: 10 gph
 Micron Removal: 10
 Filtering Area: 500 sq. in.
 Working Pressure: 15 psi
 Flow Rate: 45 gph
 Dimensions: H-5½" W-3¼"



Find all R-2000 models online:
www.GarBerFilters.com



Biofuel is a renewable fuel oil blend made from soybean oil and processed from other fats and vegetable oils. Gar-Ber Filters are compatible up to 20% blend of pure biofuel with conventional high/low sulfur home heating oil.

www.GarBerFilters.com



General Filters Inc.
 43800 Grand River
 Novi, Michigan 48375-1115
 Toll Free (866) 476-5101
 Phone (248) 476-5100
 Fax (248) 349-2366
 sales@generalfilters.com



Canadian General Filters, Ltd.
 39 Crockford Blvd.
 Scarborough, ON M1R 3B7Free
 (416) 757-3691 • (416) 757-4687 (fax)
 sales@cgfproducts.com